

Section 01 58 00b Specification for EPA Bipartisan Infrastructure Law Signage

PART 1 GENERAL

1.1 SUMMARY

- A. This specification covers the fabrication and installation of a construction sign for facilities receiving federal Bipartisan Infrastructure Law (BIL) funding through the New York Clean Water State Revolving Fund (CWSRF) or Drinking Water State Revolving Fund (DWSRF) Programs. Facilities receiving BIL funds are required to utilize this template.

1.2 RELATED SECTIONS

- A. None

1.3 SUBMITTALS

- A. Shop Drawings: In compliance with direction from the Engineer and Owner, Contractor shall prepare and submit site plan and mock-up of temporary project and informational signs.

PART 2 PRODUCTS

2.1 GENERAL

- A. The sign shall be fabricated and erected within 21 days following the notice to proceed on the first contract at the facility and shall be maintained by site Contractors, as directed by Owner, until final construction completion for all funded projects at the facility.
- B. The BIL sign must comply with the guidance provided according to the attached schematic on a white background and with the guidance available here: <https://www.whitehouse.gov/wp-content/uploads/2022/08/Building-A-Better-America-Brand-Guide.pdf>
- C. There should be one project sign per project. If the project has multiple locations, one project sign near the work occurring in an easily visible location that can be directly linked to the work taking place, as directed by the Engineer is acceptable.

2.2 MATERIALS AND FABRICATION

- A. Sign Panel: The sign panel shall be constructed of 3/4" minimum thickness marine plywood rabbeted into a 2"x4" lumber frame or other such materials capable of withstanding typical weather conditions common to the project area. Use of recycled or recovered materials is encouraged.
- B. Fasteners: All fasteners used in the fabrication of the sign shall be rust-proof.
- C. Sign Supports: The sign shall be adequately supported and braced to remain in the proper positioning and alignment, including resistance to wind loads and toppling of the sign.
- E. Coating: All paint or exterior coverings used shall be exterior grade coating suitable for use on wood or the material of construction. The sign face background and sign back shall be white and consist of a minimum two coats of paint.
- F. Lettering and Emblem: The sign shall include the following logos in an aspect ratio consistent with other lettering on the sign but not less than a height of 2.0".
 - 1. For Clean Water projects, the EFC logo available at <https://efc.ny.gov/efc-logo-pdf>
 - 2. For Drinking Water Projects, the EFC-DOH logo available at <https://efc.ny.gov/efc-doh-logo>
 - 3. The EPA logo available at <https://efc.ny.gov/epa-logo> consistent with the EPA Logo & Seal Specifications for Signage Produced by EPA Assistance Agreement Recipients as outlined in https://www.epa.gov/sites/default/files/2015-01/documents/epa_logo_seal_specifications_for_infrastructure_grants.pdf
 - 4. The sign shall include the Building a Better America Emblem that identifies the project as "a project funded by President Biden's Bipartisan Infrastructure Law" as outlined in <https://www.whitehouse.gov/wp-content/uploads/2022/08/Building-A-Better-America-Brand-Guide.pdf>
 - 5. BIL projects must incorporate the following language:

- i. This project is jointly funded by the New York State [Clean Water/Drinking Water] State Revolving Fund and the U.S. Environmental Protection Agency and President Biden's Bipartisan Infrastructure Law. The [CWSRF/DWSRF] is administered by the New York State Environmental Facilities Corporation [with its partner the New York State Department of Health (*for DWSRF projects*)]

PART 3 EXECUTION

3.1 INSTALLATION

- A. The project sign shall be erected in the location and alignment, as directed by the Engineer, with the bottom of the sign panel a minimum of five feet above existing grade.


3.2 MAINTENANCE

- A. The Contractor shall provide any and all materials required to maintain the sign in good condition throughout the duration of the Contract.
- B. Upon notification of the Owner, the Contractor shall remove the sign from the construction site.

End of Section

ATTACHMENT 1

Building A Better America General Guidelines for Logo Applications

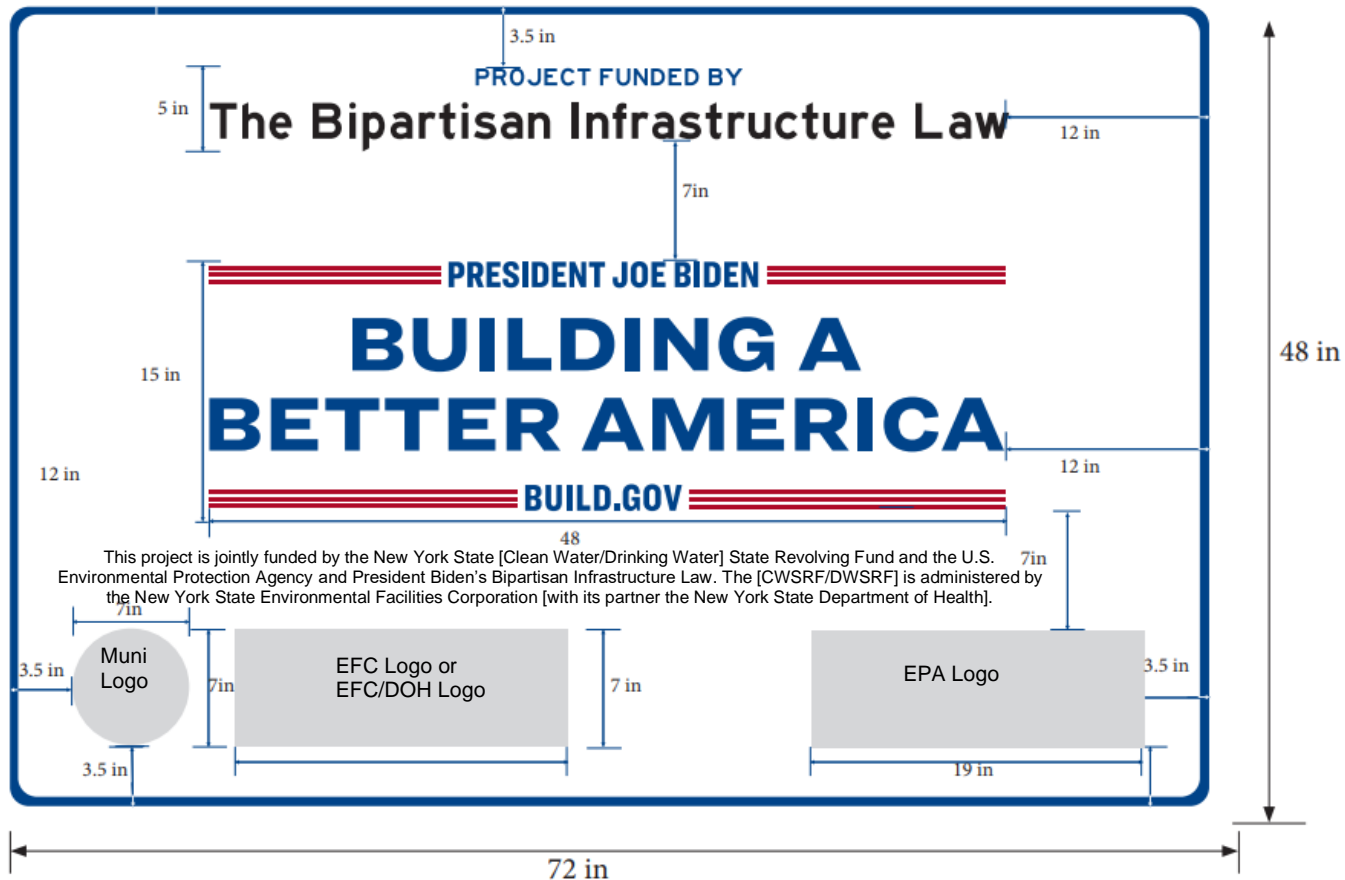




Variations and Usage

There is one approved mark associated with the Building A Better America logo. To preserve the integrity of the Building A Better America logo mark, make sure to apply them correctly. Altering, distorting, or recreating the 'marks' in any way weakens the power of the image and what it represents.

Layout and design of signs and communication materials will vary, so care must be taken when applying the logo mark.



The colors, graphics and fonts used should conform to graphic standards.

COLOR		CMYK	RGB	HEX P	MS
	Blue	83,48,0,48	22 / 68 / 132	#164484	PMS7687C
	Red	0,100,81,0	255/0/49	#FF0031	PMS185C
	White	2,2,0, 3	242 /244/248	#F2F4F8	Bright White